

Design Data	
Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	A: Ball - B:Sleeve


Performance data		
Rated voltage [V]	U_N	24
Nominal torque [Nm]	M_N	3.00
No-load speed [min^{-1}]	n_0	14.0
Nominal power [W]	P_N	3.60
Nominal current [A]	I_N	1.0
Nominal force [kN]	F_N	0.00
Duty cycle	s1	

Sensor data	
Pulses	234
Output channels	1


Other data	
Gear ratio	78/1
Gear wheel material	bronze
Suppression components	$6\mu\text{H}, 1\text{nF}$
Enclosure class	IP 30
Weight [kg]	1.210

Remarks: d = for thread-forming screw M6 DIN ISO 965-2




Characteristic curves

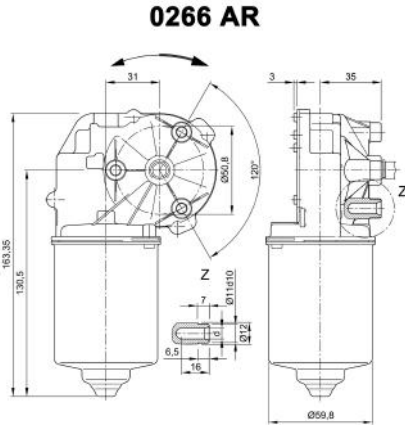

Motor picture

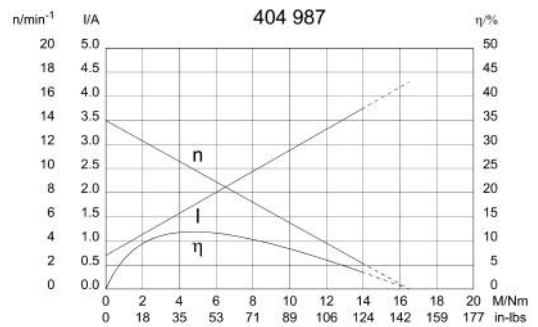


Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)




Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)

K 320




Flat plug (DIN 46244) 6,3x0,8 mating with receptacle housing part#180907, drwg# C-180907& Receptacles for tabs, conductor cross section 0,5-1,5 sqmm (20-18AWG) part# 925603-x, drwg# 925603 www.tycoelectronics.com

K 321



I Ground connection
Blade terminal 6.3 x 0.8 DIN 46 244

K 326



MAS-CON solder tail MLAS 100-3435 mating with end connector CE 100F-22-xx-x-x or CEP 100F-22-xx-x-x

Notes
